

To : PT Niterra Mobility Indonesia

Proposal for
**Switch HUB Replacement and VLAN
Deployment**

PT. KDDI Indonesia

Version History

#	Version	Date	Page	Updated
1	1.0	23 rd May	-	Newly created.

Agenda

1. Customer Requirement and Our Proposal
2. Switch Managable AT X230
3. Engineering Service
4. Deliverables
5. Schedule

1. Customer Requirement and Our Proposal

Customer Requirement and Proposal Service

We recognize customer requirement as follows and proposes the following services.

#	Customer Requirement		KDDI proposal	
	Category	Detail	Service	Remarks
1	Network	Currently customer have many switch HUB Allied Telesis Unmanage (8 Port and 16 Port) that use for the operation in Factory Area and Request to replace with manageable switch AT	Network	We will provide new switch AT manageable to replace unmanage switch in factory area

2. Solution Overview

AT-x230-10GT-50

Interface :

10/100/1000T (RJ-45) COPPER PORTS : 8 Port

100/1000X SFP PORTS : 2 Port

TOTAL PORTS : 10 Port

POE ENABLE : No



Performance :

- Up to 16K MAC addresses
- 512MB DDR SDRAM (GT models)
- 4094 configurable VLANs (GT models)

IP Feature :

- IPv4 static routing and RIP
- DHCPv4 relay and client

Management :

- Console management port on the front panel for ease of access
- Web-based Graphical User Interface (GUI)

AT-x230-18GT-50

Interface :

10/100/1000T (RJ-45) COPPER PORTS : 16 Port

100/1000X SFP PORTS : 2 Port

TOTAL PORTS : 18 Port

POE ENABLE : No



Performance :

- Up to 16K MAC addresses
- 512MB DDR SDRAM (GT models)
- 4094 configurable VLANs (GT models)


IP Feature :

- IPv4 static routing and RIP
- DHCPv4 relay and client

Management :

- Console management port on the front panel for ease of access
- Web-based Graphical User Interface (GUI)

New Topology (Propose)

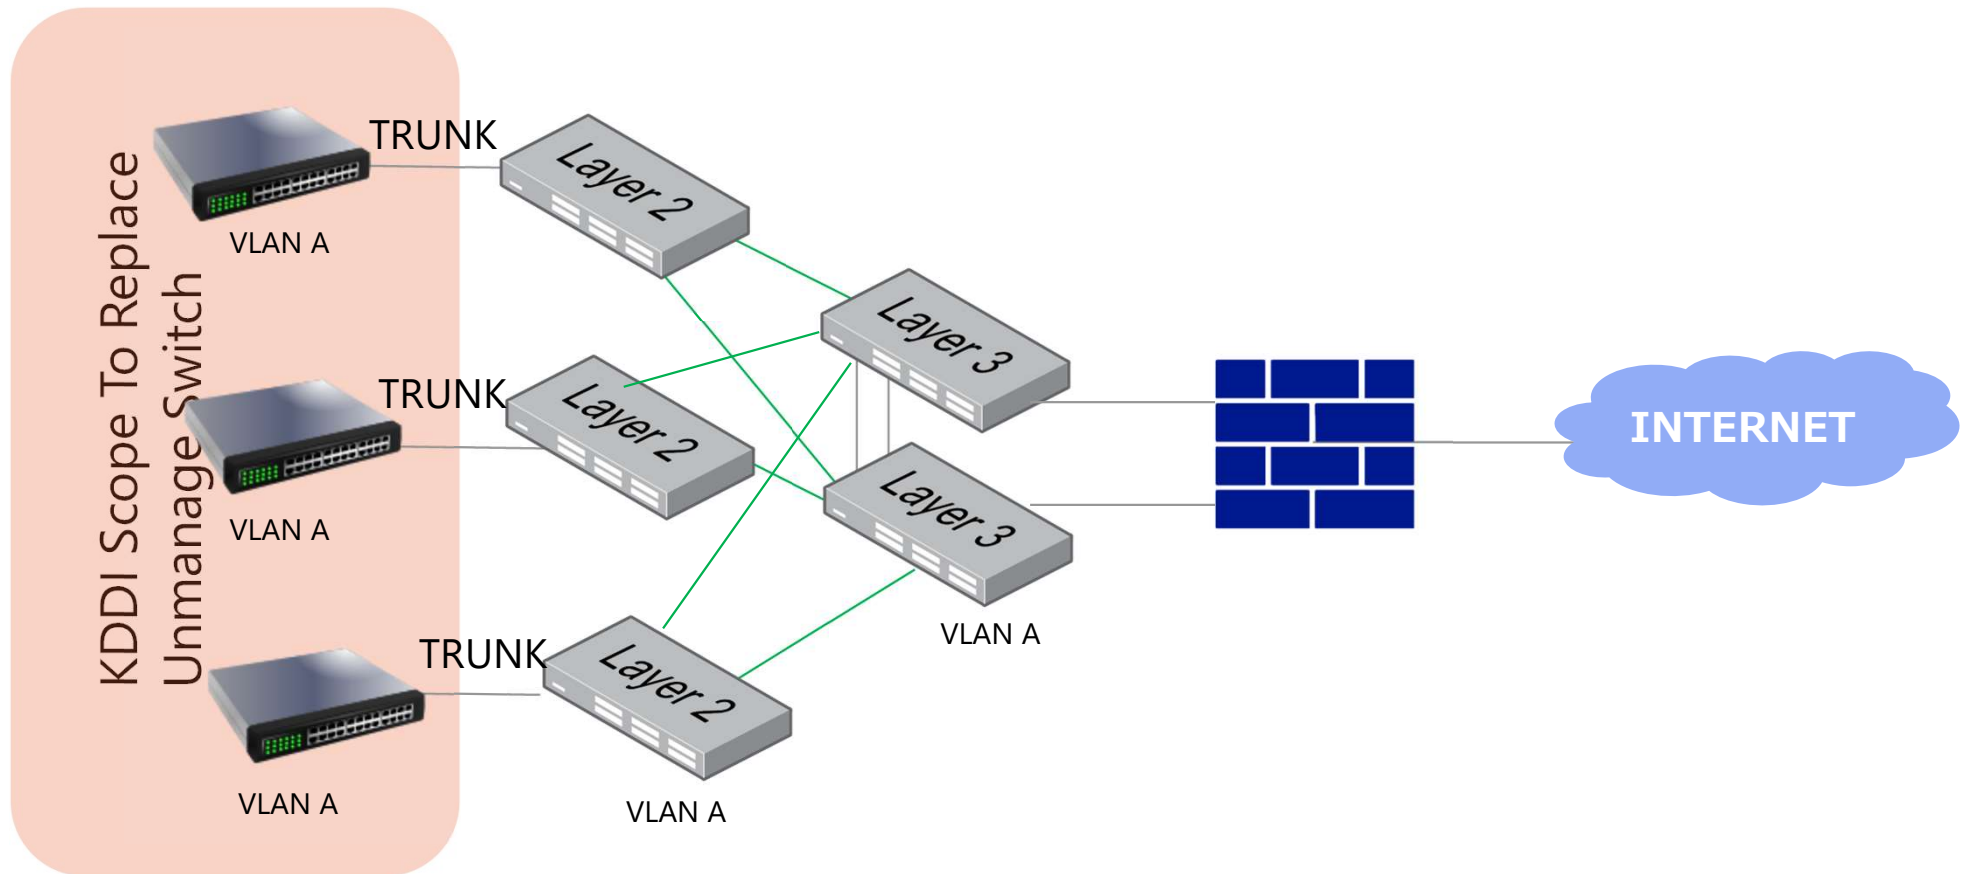

Base on above diagram, KDDI will replace all switches unmanage that have checked in factory area. KDDI also will configured VLAN Interface for all new switched, Trunking to existing switch and assign VLAN Access to each endpoint devices. Our recommendation is created new VLAN Database for management new switches to be secure from access VLAN User. Please share for credential all existing switches to reconfigure VLAN Trunk Interface.

3. Engineering Service

Engineering Service Scope

Main : ☉ Sub : ○

#	Action Item		PIC		Remarks
			Niterra	KID	
Preparation					
1	Design	Prepare design for new switched managable	○	◎	
2	Initial Setup	Site survey for checking current VLAN configuration	○	◎	
3		Config preparation and Kitting Process	-	◎	
Migration Operation					
4	Migration activity	Delivery all new switches to Niterra Office	-	◎	Power outlet should be prepared by customer
5		Power on and Install All new switches	-	◎	
6		Replacement and Integration into existing network environment	-	◎	
7		Reconfigure existing switch for Trunking VLAN database	○	◎	Credentail should be shared by customer
		Reconfigure Policy to control VLAN Access management switch from VLAN User	○	◎	Credentail should be shared by customer
8		Functional test	○	◎	
After Migration					
9	Go Live	Onsite Standby half business day after implementation	○	◎	KDDI will stand-by.
10	Documentation	Prepare documentation	-	◎	

Conditions

- Power source in each switch location should be provided by customer
- Cabling material should be provided by customer if any
- Additional laying cable and termination should be done by customer
- Login credential for existing switch and firewall should be shared by customer for checking and reconfigure trunking vlan
- KDDI only provided switch non PoE 8 Port (30 Unit) and 16 Port (6 Unit)
- Disposal is out of scope
- Any additional reconfiguration in existing network environment (WLC, AP, etc) that not related with trunk vlan configuration is out of scope
- Firmware upgrade for existing network devices (Switched, Firewall, Router, WLC, AP, etc) that not related with trunk vlan configuration is out of scope
- End point devices troubleshooting that not related with VLAN Access configuration is out of scope

4. Deliverables

Deliverables

#	Deliverables
1	AT Switch X230 8 Port Non PoE 30 Unit
2	AT Switch X230 16 Port Non PoE 6 Unit
2	Design document
3	Work timeline (WBS)
4	Unit Testing Document
5	Network Documentation

5. Schedule

Schedule

This is standard schedule. Official schedule will be provided after received PO.

		1 st Month				2 nd Month				3 rd Month			
		1 w	2 w	3 w	4 w	1 w	2 w	3 w	4 w	1 w	2 w	3 w	4 w
Milestone		▼ PO	▼ Kick off Meeting								▼ Go Live		
0	Meeting	▼	▼	▼		▼		▼					
1	Preparation & Implementation		Survey	Design Document				Kitting Process		Delivery		Installation	
											Documentation		

